

BER 100

Heat-shrinkable tube made of elastomer




- medium-walled
- excellent resistance to fuel, oils and other chemicals
- self-extinguishing
- practically non-flammable

Specifications

Description	BER 100
Material	Elastomer
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+150°C
Shrink temp. Min.	+120°C, for complete shrinkage +175°C
Flammability	self-extinguishing
Longitudinal change	+/-10% max.
Tensile strength	>11,7 MPa
Dielectric strength	>7,9 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

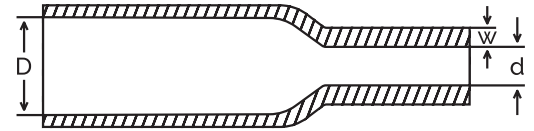

TYPE	on delivery	after shrink		
BER 100	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
1/8	3,2	1,6	0,76	50
3/16	4,8	2,4	0,84	50
1/4	6,4	3,2	0,89	50
3/8	9,5	4,8	1,02	50
1/2	12,7	6,4	1,22	30
3/4	19,1	9,5	1,45	30
1	25,4	12,7	1,78	30
1 1/2	38,1	19,1	2,41	15
2	50,8	25,4	2,79	15
3	76,2	38,1	2,79	15
4	97,0	50,0	2,79	1

On request, we can print and cut this heat-shrink tubing according to your specifications.