


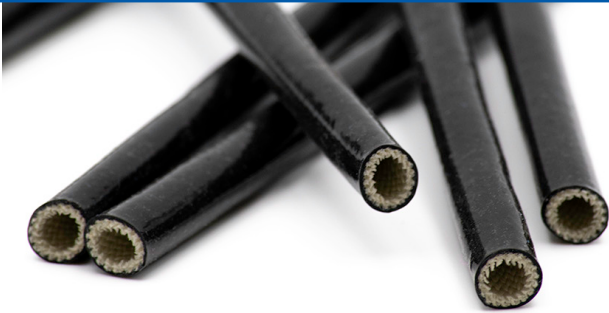

- expandable
- highly flexible
- self-extinguishing
- UL-approved
- the Tube can be expanded up to twice its delivery diameter

Specifications	
Description	BIS EXP 230
Material	Fiberglass / silicone-rubber
Operating temp. Min.	-70°C
Operating temp. Max.	+235°C (shortterm +300°C)
Flammability	self-extinguishing
Dielectric strength	>9,0 kV / RT
	>7,0 kV after 7 Tagen @ 265°C
	>7,0 kV after 60 Tagen @ 235°C
	>8,5 kV expanded
Approvals / Standards	
 REACH compliant  RoHS compliant 	

Colours

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS EXP 230	(mm)	(mm)	(Meter)
2,0	2,0 + 0,2	0,65	200
3,0	3,0 + 0,2	0,75	200
4,0	4,0 + 0,3	0,75	200
6,0	6,0 + 0,3	0,85	100
8,0	8,0 + 0,3	1,00	100
10,0	10,0 + 0,5	1,00	100
12,0	12,0 + 0,5	1,00	50
14,0	14,0 + 0,5	1,20	50
16,0	16,0 + 1,0	1,20	50
18,0	18,0 + 1,0	1,20	50
20,0	20,0 + 1,0	1,30	25
22,0	22,0 + 1,0	1,30	25
25,0	25,0 + 1,0	1,30	25