



BIS GE PA / EMV

PA 6.6 expandable braided sleeve with silver coating




- halogen-free
- high temperature resistance
- specifically designed for high-frequency radiation shielding up to 54 dB

Specifications

Description	BIS GE PA / EMV
Material	PA 6.6 / Silver
Operating temp. Min.	-40°C
Operating temp. Max.	+160°C
Approvals / Standards	 

Colours

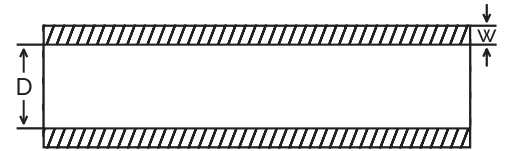

TYPE	Recommended diameter (D) min.	Recommended diameter (D) max.	Packing unit
BIS GE PA / EMV	(mm)	(mm)	(Meter)
1,5/4	1,5	4,0	100
3/6	3,0	6,0	100
5/11	5,0	11,0	100
7/15	7,0	15,0	100
8/18	8,0	18,0	100
16/26	16,0	26,0	100
18/30	18,0	30,0	100
24/36	24,0	36,0	100
32/47	32,0	47,0	100
32/58	32,0	58,0	100
32/68	32,0	68,0	100
32/85	32,0	85,0	50
50/115	50,0	115,0	50

070/J474/10/05.2020