


BIS GE PA

Polyamide 6.6 expandable braided sleeve

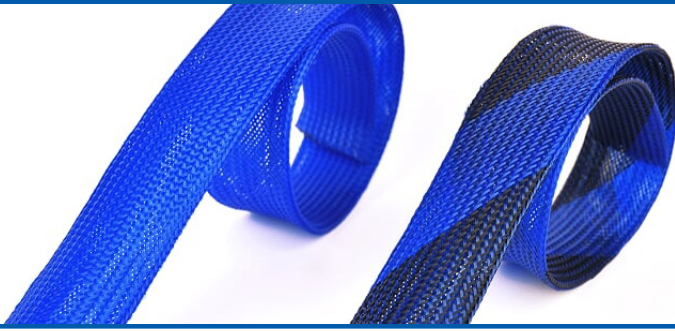


- halogen-free
- self-extinguishing

Specifications

Description	BIS GE PA
Material	PA 6.6
Operating temp. Min.	-40°C
Operating temp. Max.	+180°C
Flammability	self-extinguishing
Approvals / Standards	



Colours

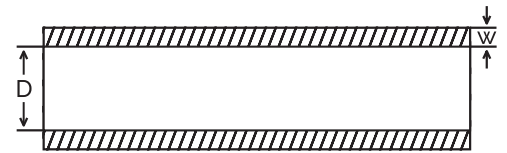

TYPE	Recommended diameter (D) min. (mm)	Recommended diameter (D) max. (mm)	Packing unit (Meter)
BIS GE PA			
2/3	1,5	5,0	100
3/4	2,0	7,0	100
4/5	3,5	8,0	100
4/9,5	4,0	9,5	100
6/8	5,0	11,0	100
10/12	7,0	15,0	100
14/16	8,0	18,0	100
16/26	16,0	26,0	100
18/25	18,0	30,0	100
30	24,0	36,0	100
40/45	32,0	47,0	100
50/55	32,0	58,0	100
60/65	32,0	68,0	50
80	32,0	85,0	50
100	50,0	115,0	50

070/J475/110/05.2020