


# BIS WRAP PET

Self-closing PET braided sleeve

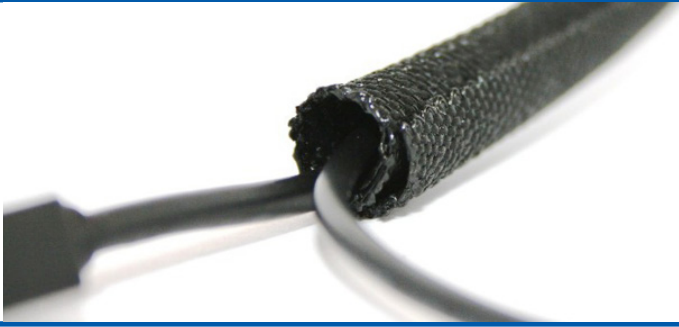


- halogen-free
- for post-assembly application

## Specifications

Description	BIS WRAP PET
Material	PET
Operating temp. Min.	-55°C
Operating temp. Max.	+150°C
Approvals / Standards	



## Colours

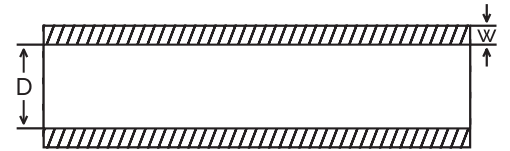

TYPE	Recommended diameter (D) min.	Recommended diameter (D) max.	Packing unit
<b>BIS WRAP PET</b>	(mm)	(mm)	(Meter)
5	3,0	5,0	100
8	5,0	8,0	100
10	8,0	10,0	100
13	10,0	13,0	100
16	13,0	16,0	100
19	16,0	19,0	100
25	22,0	25,0	100
29	26,0	29,0	100
32	29,0	32,0	100
38	32,0	38,0	100
50	44,0	50,0	100

070/J479/110/05.2020