




- Universally applicable
- Very flexible
- Low-cost

Specifications

Description	BP 105
Material	Polyolefin, thin-walled
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+105°C
Shrink temp. Min.	+90°C
Flammability	not flame retardant
Longitudinal change	+/-5% max.
Tensile strength	>10,4 MPa
Dielectric strength	>15 kV/mm
Adhesive coating	none
Approvals / Standards	



Colours

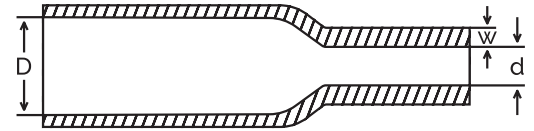

TYPE	on delivery	after shrink		
BP 105	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
3/64	1,20	0,60	0,50	150
1/16	1,60	0,80	0,55	150
3/32	2,40	1,20	0,55	150
1/8	3,20	1,60	0,55	150
3/16	4,80	2,40	0,55	75
1/4	6,40	3,20	0,65	75
3/8	9,50	4,80	0,65	75
1/2	12,70	6,40	0,65	50
5/8	16,00	8,00	0,65	50
3/4	19,10	9,50	0,80	30
1	25,40	12,70	0,95	30
1 1/4	32,00	16,00	1,05	30
1 1/2	38,10	19,10	1,05	30
2	50,80	25,40	1,14	30
3	76,20	38,10	1,25	15
4	101,60	50,80	1,25	15

On request, we can print and cut this heat-shrink tubing according to your specifications.