

BP 135 GE/GR

Polyolefin heat-shrink tubing



- High temperature resistance
- Flame-retardant
- Flexible
- Ideally suited for grounding cables and mains


Specifications

Description	BP 135 GE/GR
Material	Polyolefin, thin-walled
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+135°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	none

Approvals / Standards



Colours

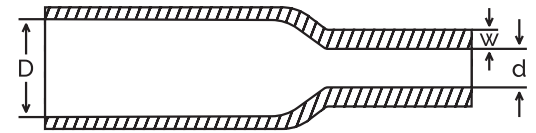

TYPE	on delivery	after shrink		
BP 135 GE/GR	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
3/64	1,20	0,60	0,33	150
1/16	1,60	0,80	0,36	150
3/32	2,40	1,20	0,44	150
1/8	3,20	1,60	0,44	150
3/16	4,80	2,40	0,51	75
1/4	6,40	3,20	0,56	75
3/8	9,50	4,80	0,56	75
1/2	12,70	6,40	0,65	50
3/4	19,10	10,00	0,80	30
1	25,40	12,70	0,90	30
1 1/4	32,00	16,00	1,02	30
1 1/2	38,10	19,10	1,02	30
2	50,80	25,40	1,14	30
3	76,20	38,10	1,27	15
4	101,60	50,80	1,40	15

On request, we can print and cut this heat-shrink tubing according to your specifications.