


- High shrink ratio
- High temperature resistance
- Flame-retardant
- Flexible

Specifications

Description	BP 300
Material	Polyolefin, thin-walled
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+135°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	none
Approvals / Standards	



Colours

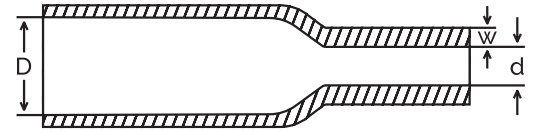

TYPE	on delivery	after shrink		
BP 300	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
1,50/0,50	1,50	0,50	0,45	150
3,00/1,00	3,00	1,00	0,55	150
4,80/1,60	4,80	1,60	0,65	75
6,00/2,00	6,00	2,00	0,65	75
9,00/3,00	9,00	3,00	0,75	50
12,00/4,00	12,00	4,00	0,75	50
18,00/6,00	18,00	6,00	0,85	30
24,00/8,00	24,00	8,00	1,00	30
39,00/13,00	39,00	13,00	1,15	30
50,00/17,00	50,00	17,00	1,30	30

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear