

# BP 400

## Polyolefin heat-shrink tubing




- Very high shrink ratio
- Flame-retardant
- Flexible

### Specifications

Description	BP 400
Material	Polyolefin, thin-walled
Shrink ratio	4:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	none
Approvals / Standards	



### Farben

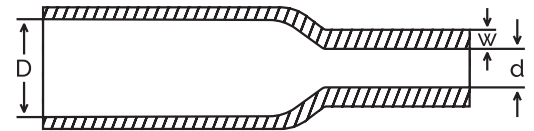

TYPE	on delivery	after shrink		
BP 400	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
8,0/2,0	8,0	2,0	0,95	100
10,0/2,5	10,0	2,5	1,00	100
12,0/3,0	12,0	3,0	1,00	100
16,0/4,0	16,0	4,0	1,00	100
18,0/4,5	18,0	4,5	1,00	100
20,0/5,0	20,0	5,0	1,00	100
24,0/6,0	24,0	6,0	1,40	50
32,0/8,0	32,0	8,0	1,60	50

On request, we can print and cut this heat-shrink tubing according to your specifications.