



- High shrink ratio
- Flame-retardant
- Adhesive lined


Specifications

Description	BPBK
Material	Polyolefin, adhesive-lined
Shrink ratio	4:1
Operating temp. Min.	-40°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+110°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>19,7 kV/mm
Adhesive coating	yes

Approvals / Standards



Colours

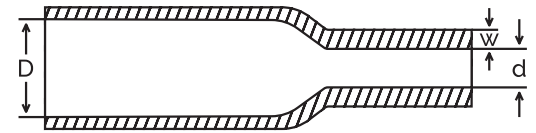

TYPE	on delivery	after shrink		
BPBK	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
5,7/1,27	5,70	1,27	1,50	100
8,0/1,65	8,00	1,65	1,80	100
10,8/2,40	10,80	2,40	2,20	100
17,8/4,45	17,80	4,45	2,40	100

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear