


- thick-wall
- trackingresistant
- halogenfree

Specifications

Description	BPBT
Material	Polyolefin, thick-wall, halogenfree
Shrink ratio	2,5:1
Operating temp. Min.	-40°C
Operating temp. Max.	+105°C
Shrink temp. Min.	+125°C
Longitudinal change	+/-10% max.
Tensile strength	>12,0 MPa
Dielectric strength	>17 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

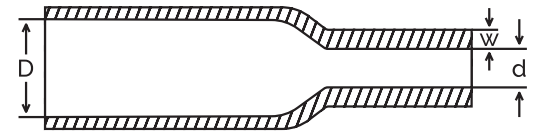

TYPE	on delivery		after shrink	
	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
BPBT				
25/10	25,0	10,0	4,0	1,22
40/16	40,0	16,0	4,0	1,22
50/20	50,0	20,0	4,0	1,22
75/25	75,0	25,0	4,0	1,22
95/30	95,0	30,0	4,0	1,22
120/40	120,0	40,0	4,1	1,22
180/58	180,0	58,0	4,1	1,22