

# BPDW 100

## Adhesive lined Polyolefin heat-shrink tubing





- High shrink ratio
- Flame-retardant
- Adhesive lined

### Specifications

Description	BPDW 100
Material	Polyolefin, double-walled
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+110°C
Flammability	flame-retardant <sup>1</sup>
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	yes
Approvals / Standards	



### Colours

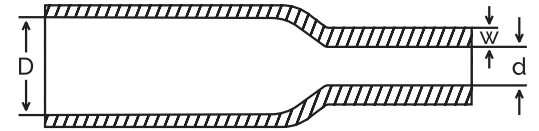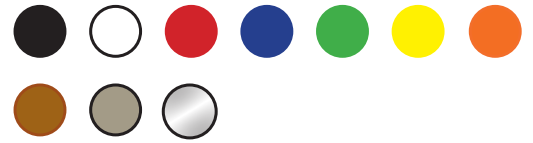

TYPE	on delivery	after shrink			
BPDW 100	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)	Packaging unit lengths (Meter)
3,0/1,0	3,00	1,00	1,00	150	1,22
4,8/1,6	4,80	1,60	1,10	75	1,22
6,0/2,0	6,00	2,00	1,10	75	1,22
9,0/3,0	9,00	3,00	1,40	50	1,22
12,0/4,0	12,00	4,00	1,78	25	1,22
19,0/6,0	19,00	6,00	2,25	25	1,22
24,0/8,0	24,00	8,00	2,54	25	1,22
39,0/13,0	39,00	13,00	2,54	25	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.

<sup>1</sup> except clear