

BPDW 104

Adhesive lined Polyolefin heat-shrink tubing




- Very high shrink ratio
- Flame-retardant
- Adhesive lined

Specifications

Description	BPDW 104
Material	Polyolefin, double-walled
Shrink ratio	4:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+110°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	yes
Approvals / Standards	



Colours

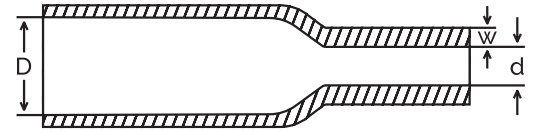

TYPE	on delivery	after shrink			
BPDW 104	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)	Packaging unit lengths (Meter)
4,0/1,0	4,00	1,00	1,00	100	1,22
8,0/2,0	8,00	2,00	1,00	50	1,22
12,0/3,0	12,00	3,00	1,40	25	1,22
16,0/4,0	16,00	4,00	1,78	25	1,22
24,0/6,0	24,00	6,00	2,25	25	1,22
32,0/8,0	32,00	8,00	2,54	25	1,22
52,0/13,0	52,00	13,00	2,54	25	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear