

BPHW A

thick-wall adhesive lined polyolefin heat-shrink tubing




- extreme high shrink ratio
- thick-wall
- adhesive lined

Specifications

Description	BPHW A
Material	Polyolefin, thick-wall
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+110°C
Shrink temp. Min.	+120°C
Flammability	not flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>12,0 MPa
Dielectric strength	>20,0 kV/mm
Adhesive coating	yes
Approvals / Standards	



Colours

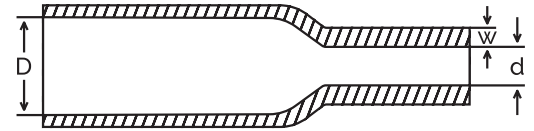

TYPE	on delivery	after shrink		
BPHW A	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
19,0/3,2	19,0	3,2	3,2	1,22
33,0/5,5	33,0	5,5	3,4	1,22
44,4/7,4	44,4	7,4	3,6	1,22
50,8/8,3	50,8	8,3	4,8	1,22
69,8/11,7	69,8	11,7	4,8	1,22
88,9/17,1	88,9	17,1	4,8	1,22
119,4/22,9	119,4	22,9	4,8	1,22
235,0/40,0	235,0	40,0	4,8	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.