



- semi-conductive
- thick-walled
- especially developed for the insulation of connectors in medium voltage technology


Specifications

Description	BPSCON
Material	Polyolefin
Shrink ratio	2.5:1
Operating temp. Min.	-45°C
Operating temp. Max.	+105°C
Shrink temp. Min.	+100°C
Flammability	self-extinguishing
Longitudinal change	+/-10% max.
Tensile strength	>12 MPa
Dielectric strength	>20,0 kV/mm
Adhesive coating	no
Approvals / Standards	

REACH
compliant

RoHS
compliant

Colours

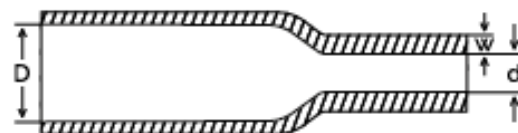

TYPE	on delivery	after shrink		
BPSCON	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
35/13	35,0	13,0	6,00	1,00
45/15	45,0	15,0	6,00	1,00
55/20	55,0	20,0	6,50	1,00
65/25	65,0	25,0	6,50	1,00
85/30	85,0	30,0	6,50	1,00
100/38	100,0	38,0	6,50	1,00
120/45	120,0	45,0	6,80	1,00
140/50	140,0	50,0	7,00	1,00

On request, we can print and cut this heat-shrink tubing according to your specifications.