




- flame-retardant
- resistant to chemical and mechanical conditions
- high temperature resistance
- thin wall

Specifications table with 2 columns: Property and Value. Includes Description (BPVDF 190), Material (PVDF), Shrink ratio (2:1), Operating temp. Min. (-55°C), Operating temp. Max. (+190°C), Shrink temp. Min. (+175°C), Flammability (Flame-retardant), Longitudinal change (+-5% max.), Tensile strength (>30 MPa), Dielectric strength (>33 kV/mm), Adhesive coating (no), and Approvals / Standards (REACH and RoHS compliant).

Colours table with 2 columns: Colour and Visual representation. Shows two color options: black and white.

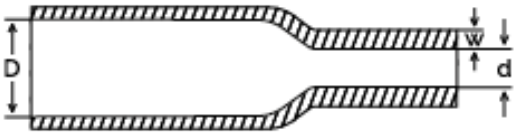

Main specifications table with 6 columns: TYPE, on delivery, after shrink, Wall thickness (w) nom. (mm), Packa-ging unit (Meter), and Packaging unit lengths (Meter). Rows list various sizes from 3/64 to 1/2.

On request, we can print and cut this heat-shrink tubing according to your specifications.