


- adhesive lined
- excellent for the quick and simple repair of damaged cables and pipes
- protection against damp and corrosion

### Specifications

Description	BWAS
Material	Polyolefin
Shrink ratio	3:1
Operating temp. Min.	-40°C
Operating temp. Max.	+65°C
Shrink temp. Min.	+120°C
Adhesive coating	yes
Approvals / Standards	



### Colours

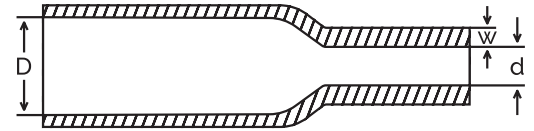

TYPE	on delivery		after shrink	
	Ø (D) min. (mm)	Ø (d) max. (mm)	Ø (d) max. (mm)	Packaging unit lengths (Meter)
<b>BWAS</b>				
34/10	34,00	10,00		0,5; 0,75; 1,0; 1,5
50/10	50,00	10,00		0,5; 0,75; 1,0; 1,5
75/15	75,00	15,00		0,5; 0,75; 1,0; 1,5
82/20	82,00	20,00		0,5; 0,75; 1,0; 1,5
105/30	105,00	30,00		0,5; 0,75; 1,0; 1,5
122/28	122,00	28,00		0,5; 0,75; 1,0; 1,5
137/34	137,00	34,00		0,5; 0,75; 1,0; 1,5
160/55	160,00	55,00		0,5; 0,75; 1,0; 1,5
200/55	200,00	55,00		0,5; 0,75; 1,0; 1,5
250/98	250,00	98,00		0,5; 0,75; 1,0; 1,5