

Kabelbinder/ Cable ties

GT

Kabelbinder aus PA 6.6

High-quality PA 6.6 cable ties

Eigenschaften/ Properties

- Universell einsetzbar
- Halogenfrei
- Silikonfrei
- UV-Beständigkeit
- Universally applicable
- Halogen-free
- Silicone-free
- UV resistance



Kabelbinder aus PA 6.6
High-quality PA 6.6 cable ties

Standard-Kabelbinder aus hochwertigem PA 6.6
Standard cable ties made from high-quality polyamide 6.6.

Norm/ Standard
UL 94 V2



Technische Daten/ Technical data	
Beschreibung Description	GT
Material Material	Polyamid 6.6 Polyamide 6.6
Einsatztemp. Min. Operating temp. Min.	-40°C
Einsatztemp. Max. Operating temp. Max.	+85°C (+105°C auf Anfrage verfügbar) +85°C (+105°C available on request)

BIT Kabelbinder / GT /05.2023

GT

Kabelbinder aus PA 6.6

High-quality PA 6.6 cable ties


Abmessungen
Dimensions

TYP	Länge length	Breite Width	Zugfestigkeit Tensile Strength	VPE (Stück)
	(mm)	(mm)	(kgs)	PU (Piece)
GT-80MC	82.0	2.5	8.0	100
GT-90MC	94.0	2.5	8.0	100
GT-100MC	100.0	2.5	8.1	100
GT-120MC	122.0	2.5	8.1	100
GT-160MC	160.0	2.5	8.1	100
GT-200MC	200.0	2.5	8.1	100
GT-250MC	250.0	2.5	14.0	100
GT-300MC	300.0	2.5	14.0	100
GT-140IC	143.0	3.6	18.2	100
GT-150IC	150.0	3.6	18.2	100
GT-200IC	202.0	3.6	18.2	100
GT-250IC	251.0	3.6	18.2	100
GT-300IC	303.0	3.6	18.2	100
GT-370IC	371.0	3.6	18.2	100
GT-120STC	121.0	4.8	22.2	100
GT-160STC	160.0	4.8	22.2	100
GT-180STC	179.0	4.8	22.2	100
GT-190STC	192.0	4.8	22.2	100
GT-200STC	202.0	4.8	22.2	100
GT-250STC	251.0	4.8	22.2	100
GT-280STC	280.0	4.8	22.2	100
GT-300STC	300.0	4.8	22.2	100
GT-370STC	370.0	4.8	22.2	100
GT-390STC	391.0	4.8	22.2	100
GT-430STC	430.0	4.8	22.2	100
GT-530STC	530.0	4.8	22.2	100
GT-150LHDC	151.0	7.6	54.5	100
GT-200LHDC	201.0	7.6	54.5	100
GT-250LHDC	250.0	7.6	54.5	100
GT-300LHDC	302.0	7.6	54.5	100
GT-340LHDC	338.0	7.6	54.5	100
GT-370LHDC	366.0	7.6	54.5	100
GT-450LHDC	452.0	7.6	54.5	100
GT-530LHDC	535.0	7.6	54.5	100
GT-610LHDC	615.0	7.6	54.5	100
GT-710LHDC	715.0	7.6	54.5	100
GT-430HDC	433.0	9.0	54.5	100
GT-530HDC	527.0	9.0	54.5	100
GT-590HDC	586.0	9.0	54.5	100
GT-610HDC	610.0	9.0	54.5	100
GT-710HDC	715.0	9.0	54.5	100

GT

Kabelbinder aus PA 6.6

High-quality PA 6.6 cable ties

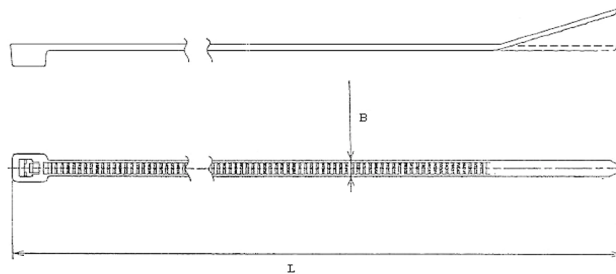

Abmessungen Dimensions

TYP	Länge length	Breite Width	Zugfestigkeit Tensile Strength	VPE (Stück)
	(mm)	(mm)	(kgs)	PU (Piece)
GT-750HDC	750.0	7.5	79.0	100
GT-770HDC	768.0	9.0	79.0	100
GT-810HDC	812.0	9.0	79.0	100
GT-910HDC	908.0	9.0	79.0	100
GT1020HDC	1018.0	9.0	79.0	100
GT-1070HDC	1065.0	9.0	79.0	100
GT-430EHDC	430.0	12.7	113.5	100
GT-480EHDC	482.0	12.7	113.5	100
GT-580EHDC	580.0	12.7	113.5	100
GT-730EHDC	728.0	12.7	113.5	100
GT-880EHDC	877.0	12.7	113.5	100
GT-1030EHDC	1030.0	12.7	113.5	100

Weitere Informationen Further Information

Farben
Colors



Andere Farben sind auf Anfrage erhältlich.
Various colors are available on request.