



- very thin wall
Flame-retardant
lay-flat

Table with 2 columns: Specification and Value. Rows include Description (HPS), Material (Hard PVC), Shrink ratio (2:1), Operating temp. Min. (-20°C), Operating temp. Max. (+105°C), Shrink temp. Min. (+80°C), Flammability (Flame-retardant), Longitudinal change (+-10% max.), Adhesive coating (no), and Approvals / Standards (UL, REACH, RoHS).

Colours section showing color swatches for black, white, red, blue, green, yellow, and silver.

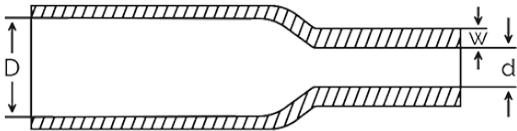


Table with 3 columns: Flat width, Wall thickness (w) nom. (mm), and Shrinkage ratio. It lists various size ranges and their corresponding shrinkage percentages.

Conversion formulas:
flat width = diameter x 1.57079
diameter = flat width x 0.6366

On request, we can print and cut this heat-shrink tubing according to your specifications..

1 UL-listed variant available on request