




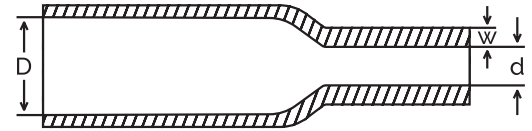


- very thin wall
- Flame-retardant
- lay-flat

### Specifications

Description	HPS
Material	Hard PVC
Shrink ratio	2:1
Operating temp. Min.	-20°C
Operating temp. Max.	+85°C (UL: +105°C)
Shrink temp. Min.	+80°C
Flammability	Flame-retardant
Longitudinal change	+/-10% max.
Adhesive coating	no
Approvals / Standards	  

### Colours



### TYP

HPS	Wall thickness (w) nom. (mm)	Schrinkage ratio
3,0 bis 14,0 mm	0,05 bis 0,10 mm	45 +/- 5 %
15,0 bis 24,0 mm	0,05 bis 0,15 mm	45 +/- 5 %
25,0 bis 39,0 mm	0,05 bis 0,30 mm	45 +/- 5 %
40,0 bis 54,0 mm	0,05 bis 0,30 mm	45 +/- 5 %
55,0 bis 74,0 mm	0,05 bis 0,30 mm	45 +/- 5 %
75,0 bis 91,0 mm	0,05 bis 0,30 mm	45 +/- 5 %
92,0 bis 149,0 mm	0,05 bis 0,30 mm	45 +/- 5 %
150,0 bis 199,0 mm	0,10 bis 0,25 mm	45 +/- 5 %
200,0 bis 249,0 mm	0,10 bis 0,20 mm	45 +/- 5 %
250,0 bis 300,0 mm	0,10 bis 0,15 mm	45 +/- 5 %

Conversion: flat width = diameter x 1.57079  
 diameter = flat width x 0.6366

On request, we can print and cut this heat-shrink tubing according to your specifications..

<sup>1</sup> UL-listed variant available on request