

SK 250

Heat-shrinkable tube made of silicone



- very flexible
- halogen-free
- high temperature stability


Specifications

Description	SK 250
Material	VMQ
Shrink ratio	1,5:1
Operating temp. Min.	-50°C
Operating temp. Max.	+200°C
Shrink temp. Min.	+80°C
Longitudinal change	+/-11 % max.
Tensile strength	>6,9 MPa
Dielectric strength	>20 kV/mm
Adhesive coating	no

Approvals / Standards



Colours

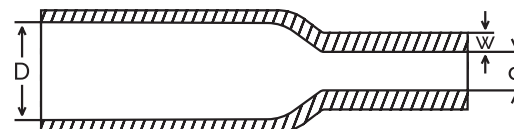

TYPE	on delivery	after shrink			
SK 250	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)	Packaging unit lengths (Meter)
1,00	1,00	0,60	1,00	30,00	1,00
1,50	1,50	0,80	1,00	30,00	1,00
2,00	2,00	1,20	1,00	30,00	1,00
3,00	3,00	1,80	1,00	30,00	1,00
4,00	4,00	2,50	1,00	30,00	1,00
5,00	5,00	3,00	1,00	30,00	1,00
6,00	6,00	3,80	1,00	30,00	1,00
7,00	7,00	4,00	1,20	30,00	1,00
8,00	8,00	4,80	1,20	30,00	1,00
9,00	9,00	5,00	1,20	30,00	1,00
10,00	10,00	6,50	1,20	30,00	1,00
12,00	12,00	7,00	1,50	30,00	1,00
15,00	15,00	9,00	1,50	30,00	1,00
20,00	20,00	13,00	2,00	30,00	1,00
25,00	25,00	15,00	2,00	30,00	1,00
30,00	30,00	18,00	2,00	30,00	1,00
41,00	41,00	27,00	3,00	30,00	1,00

On request, we can print and cut this heat-shrink tubing according to your specifications.