




- heat-shrink distribution cap
- Excellent for insulation and sealing
- UV-resistant
- Available with two to five core breakouts

### Specifications

Description	BBOS
Material	Polyolefin
Operating temp. Min.	-55°C
Operating temp. Max.	+110°C
Approvals / Standards	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 5px; text-align: center;">             REACH compliant         </div> <div style="border: 1px solid black; padding: 5px; text-align: center;">             RoHS compliant         </div> </div>

### Colours

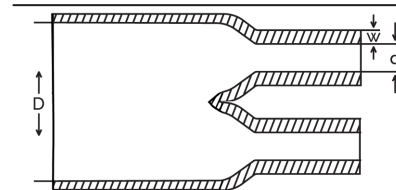

TYPE	Pre-shrunk		Recovered			
	core (D)	each breakout (d)	core (D)	each breakout (d)	wallthickness (w)	length
BBOS	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
BBOS LV 2	22,00	9,00	8,00	3,50	2,20	55,00
BBOS LV 2	30,00	14,00	12,00	4,50	2,60	93,00
BBOS LV 2	40,00	15,00	16,00	5,00	2,10	125,00
BBOS LV 2	60,00	25,00	23,00	7,50	2,60	155,00
BBOS LV 2	100,00	30,00	42,00	9,00	3,10	155,00
BBOS LV 2	150,00	20,00	75,00	6,00	3,80	170,00
BBOS LV 3	38,00	14,00	17,00	4,50	2,70	98,00
BBOS LV 3	60,00	25,00	25,00	8,00	3,00	165,00
BBOS LV 3	80,00	35,00	38,00	11,00	3,50	185,00
BBOS LV 3	110,00	46,00	50,00	17,50	4,00	250,00
BBOS LV 3	125,00	55,00	57,00	20,00	4,00	260,00
BBOS LV 3	140,00	62,00	70,00	26,00	4,00	280,00
BBOS LV 3	170,00	75,00	77,00	28,00	4,00	280,00
BBOS LV 3	40,00	15,00	16,00	4,50	2,10	125,00
BBOS LV 3	60,00	25,00	24,00	8,00	3,20	180,00
BBOS LV 3	80,00	35,00	38,00	11,00	4,00	215,00
BBOS LV 4	42,00	14,00	15,00	3,50	2,20	105,00
BBOS LV 4	55,00	20,00	21,00	5,00	3,10	150,00
BBOS LV 4	65,00	26,00	26,00	7,00	3,30	175,00
BBOS LV 4	75,00	28,00	26,00	7,00	3,30	175,00
BBOS LV 4	82,00	30,00	37,00	9,00	4,00	190,00
BBOS LV 4	90,00	32,00	37,00	9,00	4,00	190,00
BBOS LV 4	102,00	38,00	47,00	12,00	4,00	198,00
BBOS LV 4	130,00	52,00	52,00	15,00	4,00	240,00
BBOS LV 4	160,00	64,00	70,00	19,00	4,00	260,00
BBOS LV 5	40,00	13,00	19,00	4,00	2,50	98,00
BBOS LV 5	55,00	18,00	24,00	5,00	3,20	155,00
BBOS LV 5	80,00	26,00	33,00	8,00	3,00	175,00
BBOS LV 5	100,00	34,00	42,00	10,00	3,00	190,00

BBOS LV2 = 2 breakouts  
BBOS LV4 = 4 breakouts

BBOS LV3 = 3 breakouts  
BBOS LV5 = 5 breakouts