

BIS 155 (B)

fiberglass coated with Acrylic-PU-resin




- flexible
- good resistance against solvents
- self-extinguishing

Specifications

Description	BIS 155 (B)
Material	fiberglass / Acrylic-PU-resin
Operating temp. Min.	-20°C
Operating temp. Max.	+155°C
Flammability	self-extinguishing
Dielectric strength	>5,0 kV / RT
Approvals / Standards	



Colours

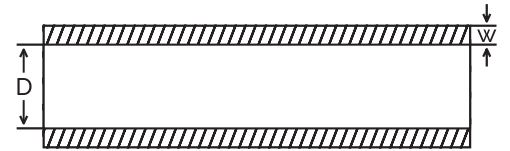

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS 155 (B)	(mm)	(mm)	(Meter)
0,5	0,5 + 0,3	0,5 +/- 0,10	200
0,8	0,8 + 0,3	0,5 +/- 0,10	200
1,0	1,0 + 0,3	0,5 +/- 0,10	200
1,5	1,5 + 0,3	0,5 +/- 0,10	200
2,0	2,0 + 0,3	0,5 +/- 0,10	200
2,5	2,5 + 0,3	0,5 +/- 0,10	200
3,0	3,0 + 0,4	0,5 +/- 0,10	200
3,5	3,5 + 0,4	0,5 +/- 0,10	200
4,0	4,0 + 0,4	0,5 +/- 0,10	100
4,5	4,5 + 0,4	0,5 +/- 0,10	100
5,0	5,0 + 0,4	0,5 +/- 0,10	100
6,0	6,0 + 0,4	0,5 +/- 0,10	100
7,0	7,0 + 0,5	0,7 +/- 0,15	100
8,0	8,0 + 0,5	0,7 +/- 0,15	100
9,0	9,0 + 0,5	0,7 +/- 0,15	100
10,0	10,0 + 0,5	0,7 +/- 0,15	100
12,0	12,0 + 0,5	0,7 +/- 0,15	100
14,0	14,0 + 0,8	0,7 +/- 0,15	100
16,0	16,0 + 1,0	0,7 +/- 0,30	50
18,0	18,0 + 1,0	0,7 +/- 0,30	50
20,0	20,0 + 1,0	0,7 +/- 0,30	50
25,0	25,0 + 1,2	1,0 +/- 0,50	50
26,0	26,0 + 1,2	1,0 +/- 0,50	50
27,0	27,0 + 1,2	1,0 +/- 0,50	50

On request, we can print and cut this heat-shrink tubing according to your specifications.

Further colours upon request