

BIS GE PP

Polypropylene expandable braided sleeve




- halogen-free
- self-extinguishing

Specifications

Description	BIS GE PP
Material	PP
Operating temp. Min.	-30°C
Operating temp. Max.	+105°C
Flammability	self-extinguishing
Approvals / Standards	



Colours

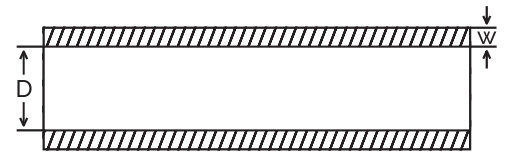

TYPE	Recommended diameter (D) min.	Recommended diameter (D) max.	Packing unit
BIS GE PP	(mm)	(mm)	(Meter)
2/3	1,5	5,0	100
3/4	2,0	7,0	100
6/8	5,0	11,0	100
10/12	7,0	15,0	100
14/16	8,0	18,0	100
16/26	16,0	26,0	100
18/25	18,0	30,0	100
24/36	24,0	36,0	100
40/45	32,0	47,0	100
50/55	32,0	58,0	100

070/J476/110/05.2020