



BIS PA 12

Polyamide (PA12) sleeve




- abrasion resistant

Specifications

Description	BIS PA 12
Material	PA
Operating temp. Min.	-40°C
Operating temp. Max.	+90°C
Approvals / Standards	 

Colours

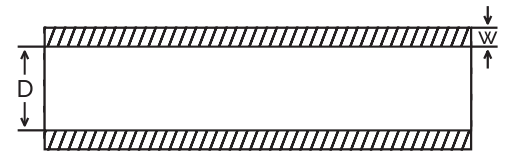

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS PA 12	(mm)	(mm)	(Meter)
2,0 x 1,0	2,00 mm	1,00 mm	100 m
3,0 x 1,0	3,00 mm	1,00 mm	100 m
4,0 x 1,0	4,00 mm	1,00 mm	100 m
6,0 x 1,0	6,00 mm	1,00 mm	100 m
8,0 x 1,0	8,00 mm	1,00 mm	100 m
9,0 x 1,5	9,00 mm	1,50 mm	100 m
11,0 x 1,5	11,00 mm	1,50 mm	50 m
12,0 x 1,5	12,00 mm	1,50 mm	50 m
12,0 x 2,0	12,00 mm	2,00 mm	50 m
14,0 x 2,0	14,00 mm	2,00 mm	50 m
16,0 x 2,0	16,00 mm	2,00 mm	50 m

On request, we can print and cut this insulating sleeve according to your specifications