




BIS PE UL

UL-approved polyethylene sleeve




- flame-retardant
- halogen-free
- practically non-flammable
- UL-certified

Specifications

Description	BIS PE UL
Material	PE
Operating temp. Min.	-40°C
Operating temp. Max.	+125°C
Approvals / Standards	  

Colours

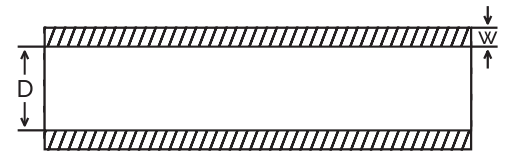

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS PE UL	(mm)	(mm)	(Meter)
0,9	0,95 +- 0,05	0,50 +- 0,06	upon request
1,4	1,45 +- 0,05	0,62 +- 0,06	upon request
2,0	2,05 +- 0,05	0,62 +- 0,06	upon request
2,5	2,55 +- 0,05	0,62 +- 0,06	upon request
3,0	3,10 +- 0,10	0,62 +- 0,06	upon request
3,4	3,50 +- 0,10	0,62+- 0,06	upon request
4,0	4,10 +- 0,10	0,62 +- 0,06	upon request
4,8	4,90 +- 0,10	0,62 +- 0,06	upon request
5,8	5,90 +- 0,10	0,62 +- 0,06	upon request
6,3	6,40 +- 0,10	0,62 +- 0,06	upon request
6,8	6,90 +- 0,10	0,62 +- 0,06	upon request
7,3	7,40 +- 0,10	0,62 +- 0,06	upon request
7,8	7,90 +- 0,10	0,62 +- 0,06	upon request
9,7	8,90 +- 0,10	0,62 +- 0,06	upon request
10,6	9,85 +- 0,20	0,62 +- 0,06	upon request
11,6	10,80 +- 0,20	0,62 +- 0,06	upon request
12,6	11,80 +- 0,20	0,75 +- 0,06	upon request
13,6	12,80 +- 0,20	0,75 +- 0,06	upon request
14,6	13,80 +- 0,20	0,75 +- 0,06	upon request
15,6	14,80 +- 0,20	0,75 +- 0,06	upon request

On request, we can print and cut this insulating sleeve according to your specifications.