



flexible

Table with 2 columns: Specification, Value. Rows include Description (BIS PE), Material (LD-PE), Operating temp. Min. (-30°C), Operating temp. Max. (+75°C), and Approvals / Standards (REACH compliant, RoHS compliant).

Colours section showing two color swatches: black and blue.

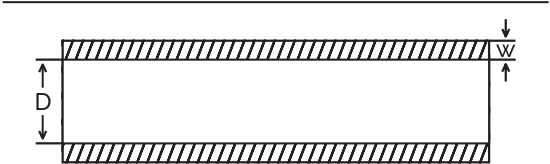


Table with 4 columns: TYPE, Inner diameter (D) (mm), wallthickness (w) nom. (mm), Packing unit (Meter). Rows list various sizes from 4,0 to 14,0.

On request, we can print and cut this insulating sleeve according to your specifications.

070/J440/10/05.2020