




- very flexible
- self-extinguishing
- fireproof
- good resistance against solvents
- halogen-free

Specifications

Description	BIS ROH (D)
Material	fiberglass
Operating temp. Min.	-70°C
Operating temp. Max.	+550°C
Flammability	fireproof, self-extinguishing
Dielectric strength	>0,7 kV according to IEC 60684 (Ø)
	>0,6 kV according to IEC 60684 (min.)
	>0,9 kV according to UL 1441
Approvals / Standards	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 5px; text-align: center;"> REACH compliant  </div> <div style="border: 1px solid black; padding: 5px; text-align: center;"> RoHS compliant  </div> </div>

Colours

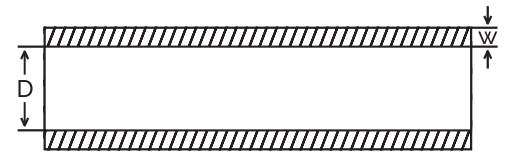

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS ROH	(mm)	(mm)	(Meter)
0,5	0,5	0,20	400
0,8	0,8	0,20	400
1,0	1,0	0,20	300
1,5	1,5	0,30	300
2,0	2,0	0,30	300
2,5	2,5	0,30	300
3,0	3,0	0,30	200
3,5	3,5	0,30	200
4,0	4,0	0,30	200
5,0	5,0	0,40	200
6,0	6,0	0,40	100
7,0	7,0	0,40	100
8,0	8,0	0,40	100
9,0	9,0	0,40	100
10,0	10,0	0,40	100
12,0	12,0	0,40	100
14,0	14,0	0,50	100
16,0	16,0	0,50	100
18,0	18,0	0,50	100
20,0	20,0	0,50	50
22,0	22,0	0,50	50
25,0	25,0	0,50	50

custom and special sizes upon request