




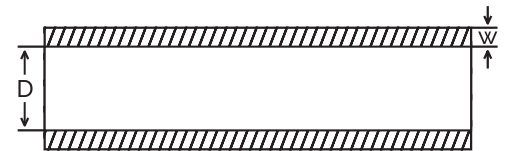


- halogen-free
- highly flexible
- UL-certified

Specifications

Description	BIS SI UL		
Material	VMQ		
Operating temp. Min.	-50°C		
Operating temp. Max.	+200°C		
Approvals / Standards			

Colours



TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS SI UL	(mm)	(mm)	(Meter)
0,50 x 0,40	0,50	0,40	200
0,80 x 0,40	0,80	0,40	200
1,00 x 0,40	1,00	0,40	200
1,50 x 0,40	1,50	0,40	200
2,00 x 0,40	2,00	0,40	200
2,50 x 0,40	2,50	0,40	100
3,00 x 0,40	3,00	0,40	100
3,50 x 0,40	3,50	0,40	100
4,00 x 0,40	4,00	0,40	100
5,00 x 0,60	5,00	0,60	100
6,00 x 0,60	6,00	0,60	50
7,00 x 0,70	7,00	0,70	50
8,00 x 0,70	8,00	0,70	50
9,00 x 0,70	9,00	0,70	50
10,00 x 0,70	10,00	0,70	50
12,00 x 0,80	12,00	0,80	50
14,00 x 1,00	14,00	1,00	50
16,00 x 1,00	16,00	1,00	50
18,00 x 2,00	18,00	2,00	25

On request, we can print and cut this insulating sleeve according to your specifications.