




- elastic
- high chemical resistance

Specifications

Description	BIS TPES	
Material	TPV	
Operating temp. Min.	-40°C	
Operating temp. Max.	+135°C	
Approvals / Standards		

Colours

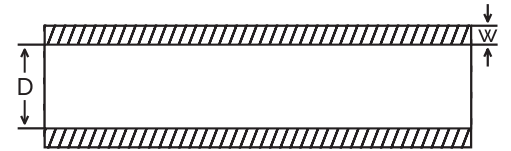

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS TPES	(mm)	(mm)	(Meter)
1,50 x 0,30	1,60 + 0,30	0,30 +/- 0,10	750
2,00 x 0,30	2,10 + 0,30	0,30 +/- 0,10	750
3,00 x 0,30	3,10 + 0,30	0,30 +/- 0,10	750
4,00 x 0,40	4,10 + 0,30	0,40 +/- 0,10	500
5,00 x 0,50	5,10 + 0,30	0,50 +/- 0,15	500
6,00 x 0,60	6,10 + 0,30	0,60 +/- 0,15	500
7,00 x 0,60	7,10 + 0,30	0,60 +/- 0,15	300
8,00 x 0,60	8,10 + 0,30	0,60 +/- 0,15	300
9,00 x 0,60	9,10 + 0,40	0,60 +/- 0,15	200
10,00 x 0,60	10,10 + 0,40	0,60 +/- 0,15	200
12,00 x 0,60	12,10 + 0,40	0,60 +/- 0,15	150
14,00 x 0,60	14,10 + 0,50	0,60 +/- 0,15	100
16,00 x 0,60	16,10 + 0,60	0,60 +/- 0,15	150
18,00 x 0,60	18,10 + 0,60	0,60 +/- 0,15	100
20,00 x 0,80	20,10 + 0,60	0,80 +/- 0,20	50
22,00 x 0,80	22,10 + 0,70	0,80 +/- 0,20	50
24,00 x 0,80	24,10 + 0,70	0,80 +/- 0,20	25
26,00 x 0,80	26,10 + 0,70	0,80 +/- 0,20	25
28,00 x 1,00	28,10 + 0,80	1,00 +/- 0,20	25
30,00 x 1,00	30,10 + 0,80	1,00 +/- 0,20	25

On request, we can print and cut this insulating sleeve according to your specifications.