




- high chemical resistance
- high temperature resistance
- highly flexible

### Specifications

Description	BIS VIT
Material	FKM
Operating temp. Min.	-20°C
Operating temp. Max.	+200°C
Approvals / Standards	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px; text-align: center;">             REACH compliant         </div> <div style="border: 1px solid black; padding: 2px; text-align: center;">             RoHS compliant         </div> </div>

### Colours

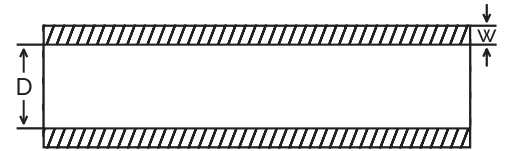

TYPE	Inner diameter (D)	wallthickness (w) nom.	Packing unit
BIS VIT	(mm)	(mm)	(Meter)
1,00 x 1,00	1,00	1,00	50
1,50 x 0,75	1,50	0,75	50
2,00 x 1,00	2,00	1,00	50
3,00 x 1,00	3,00	1,00	50
3,00 x 2,00	3,00	2,00	50
4,00 x 1,00	4,00	1,00	50
4,00 x 1,50	4,00	1,50	50
4,00 x 2,00	4,00	2,00	25
5,00 x 1,00	5,00	1,00	25
5,00 x 1,50	5,00	1,50	25
5,00 x 2,50	5,00	2,50	25
6,00 x 1,00	6,00	1,00	25
6,00 x 2,00	6,00	2,00	25
6,00 x 3,00	6,00	3,00	25
7,00 x 1,00	7,00	1,00	25
7,00 x 1,50	7,00	1,50	25
8,00 x 1,50	8,00	1,50	25
8,00 x 2,00	8,00	2,00	25
9,00 x 2,00	9,00	2,00	25
10,00 x 2,00	10,00	2,00	25
12,00 x 2,50	12,00	2,50	25
15,00 x 3,00	15,00	3,00	10
18,00 x 3,00	18,00	3,00	10
20,00 x 3,50	20,00	3,50	10
25,00 x 3,50	25,00	3,50	10
30,00 x 5,00	30,00	5,00	10

On request, we can print and cut this insulating sleeve according to your specifications.

\* „Viton“ is a trademark of the Chemours Company FC LLC