

BIS WS DUO PP

Two-piece dividable PP corrugated pipe




- halogen-free
- for post-assembly application
- good temperature resistance
- all-purpose

Specifications

Description	BIS WS DUO PP
Material	PP (mod.)
Operating temp. Min.	-40°C
Operating temp. Max.	+130°C
Approvals / Standards	



Colours

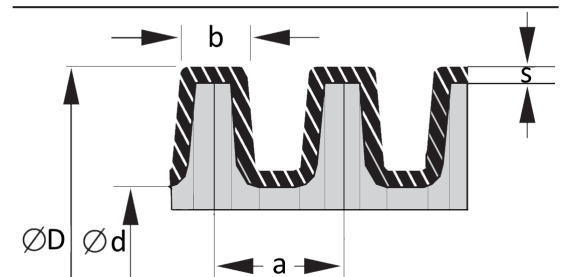

TYPE	Inside Diameter (D) min. (mm)	Outside Diameter (D) max. (mm)	Packing unit (Meter)
BIS WS DUO PP			
8,5	6,20 +/- 0,40	11,20 +/- 0,30	50
10,0	7,90 +/- 0,40	12,90 +/- 0,30	50
12,0	10,30 +/- 0,30	15,80 +/- 0,30	50
17,0	13,90 +/- 0,30	21,00 +/- 0,40	50
23,0	20,50 +/- 0,40	28,30 +/- 0,40	50
29,0	26,60 +/- 0,40	34,50 +/- 0,40	25
36,0	32,00 +/- 1,00	41,80 +/- 1,00	25
48,0	43,00 +/- 1,00	54,20 +/- 1,00	25

070/J481/110/05.2020