



- Adhesive lined
- medium-walled
- perfect for consolidating multi-core cable and wire installations


Specifications

Description	BLVK
Material	Polyolefin
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+110°C
Shrink temp. Min.	+120°C
Flammability	not flame-retardant
Longitudinal change	+/-10% max.
Dielectric strength	>20,0 kV/mm
Adhesive coating	no

Approvals / Standards



Colours

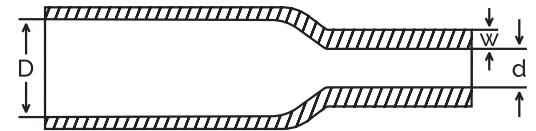

TYPE

BLVK

cable cross-section

BLVK 1,5 - 16 x 4	4 x 1,5 bis 4 x 16,0 mm ²
BLVK 1,5 - 16 x 5	5 x 1,5 bis 5 x 16,0 mm ²
BLVK 6,0 - 25 x 4	4 x 6,0 bis 4 x 25,0 mm ²
BLVK 16,0 - 50 x 4	4 x 16,0 bis 4 x 50,0 mm ²
BLVK 16,0 - 50 x 5	5 x 16,0 bis 5 x 50,0 mm ²
BLVK 25,0 - 95 x 4	4 x 25,0 bis 4 x 95,0 mm ²
BLVK 35,0 - 150 x 4	4 x 35,0 bis 4 x 150,0 mm ²
BLVK 95,0 - 300 x 4	4 x 95,0 bis 4 x 300,0 mm ²

On request, we can print and cut our heat-shrinkable joint kits according to your specifications.