

BP-HSF 125

heat shrinkable fiber tubing




- high mechanical abrasion resistance
- noise and vibration damping design
- flame-retardant
- mesh weave
- halogen-free

Specifications

Description	BP-HSF 125
Material	Polyester / Polyolefin
Shrink ratio	2:1
Operating temp. Min.	-40°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+110°C
Flammability	flame-retardant
Longitudinal change	+/-20% max.
Adhesive coating	no
Approvals / Standards	



Colours

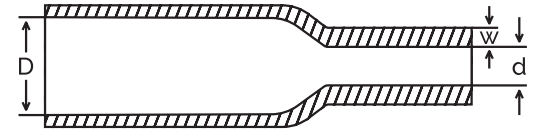

TYPE	on delivery	after shrink	
BP-HSF 125	Ø (D) min. (mm)	Ø (d) max. (mm)	Packaging unit lengths (Meter)
12/6	12,0	6,0	100
20/10	20,0	10,0	100
25/12	25,0	12,0	100
30/15	30,0	15,0	50
34/17	34,0	17,0	50
40/20	40,0	20,0	50
50/25	50,0	25,0	50
60/30	60,0	30,0	50
70/35	70,0	35,0	50
80/40	80,0	40,0	50

On request, we can print and cut this heat-shrink tubing according to your specifications.