


- flexible
- medium-walled
- excellent resistance to fuel, oils and other chemicals

Specifications

| | |
|-----------------------|---------------------------|
| Description | BP VIT |
| Material | FKM (vinylidene fluoride) |
| Shrink ratio | 2:1 |
| Operating temp. Min. | -55°C |
| Operating temp. Max. | +200°C |
| Shrink temp. Min. | +175°C |
| Flammability | Flame-retardant |
| Longitudinal change | +/-10% max. |
| Tensile strength | >8,5 MPa |
| Dielectric strength | >9,0 kV/mm |
| Adhesive coating | no |
| Approvals / Standards | |



Colours

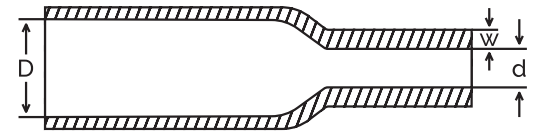

| TYPE | on delivery | after shrink | | |
|--------|-----------------|-----------------|------------------------------|------------------------|
| BP VIT | Ø (D) min. (mm) | Ø (d) max. (mm) | Wall thickness (w) nom. (mm) | Packaging unit (Meter) |
| 1/8 | 3,2 | 1,6 | 0,76 | 50 |
| 3/16 | 4,8 | 2,4 | 0,84 | 50 |
| 1/4 | 6,4 | 3,2 | 0,89 | 50 |
| 3/8 | 9,5 | 4,8 | 1,02 | 50 |
| 1/2 | 12,7 | 6,4 | 1,22 | 30 |
| 3/4 | 19,1 | 9,5 | 1,45 | 30 |
| 1 | 25,4 | 12,7 | 1,78 | 30 |
| 1 1/2 | 38,1 | 19,1 | 2,41 | 15 |
| 2 | 50,8 | 25,4 | 2,79 | 15 |

On request, we can print and cut this heat-shrink tubing according to your specifications.