


BPBK Schrumpfkappen

Shrinkable end caps

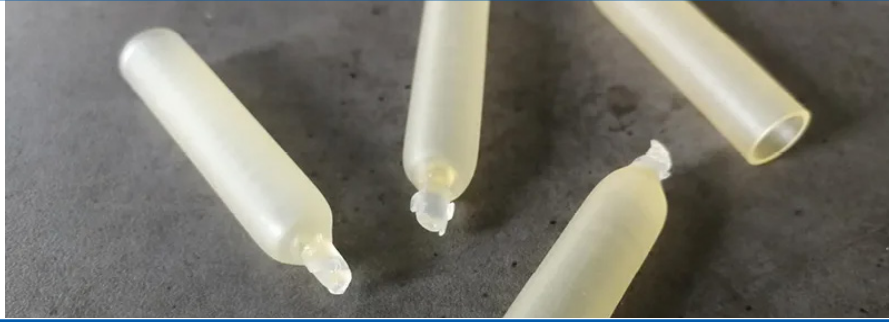


- adhesive-lined
- heat-shrink end cap

Specifications

| | |
|-----------------------|------------|
| Description | BPBK caps |
| Material | Polyolefin |
| Shrink ratio | min. 3:1 |
| Operating temp. Min. | -40°C |
| Operating temp. Max. | +125°C |
| Shrink temp. Min. | +120°C |
| Adhesive coating | yes |
| Approvals / Standards | |



Colours

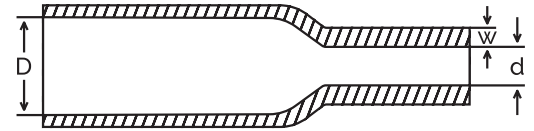

| TYPE | on delivery | | Recovered | |
|-------------------------|-----------------|-----------------|-----------------|------------------------------|
| | Ø (D) min. (mm) | Ø (d) max. (mm) | Max. cap length | Wall thickness (w) nom. (mm) |
| BPBK caps | | | | |
| 4,5 - 1,60 / 1,75 x 35 | 4,5 | 1,6 | 35,0 | 1,75 |
| 6,0 - 1,45 / 1,45 x 50 | 6,0 | 1,4 | 50,0 | 1,45 |
| 8,0 - 1,60 / 1,75 x 50 | 8,0 | 1,6 | 50,0 | 1,75 |
| 12,0 - 2,50 / 2,35 x 65 | 12,0 | 2,5 | 65,0 | 2,35 |