

BPDW 102

Adhesive lined Polyolefin heat-shrink tubing




- flame-retardant
- adhesive lined

Specifications

Description	BPDW 102
Material	Polyolefin, double-walled
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+110°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>15 kV/mm
Adhesive coating	yes
Approvals / Standards	



Colours

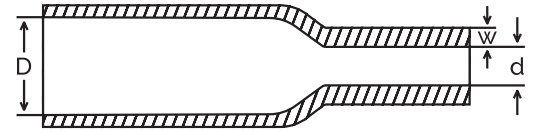

TYPE	on delivery	after shrink			
BPDW 102	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)	Packaging unit lengths (Meter)
1,6/0,8	1,6	0,8	0,55 +/-0,10	150	1,22
2,4/1,2	2,4	1,2	0,55 +/-0,10	75	1,22
3,2/1,6	3,2	1,6	0,60 +/-0,10	75	1,22
4,8/2,4	4,8	2,4	0,70 +/-0,10	75	1,22
6,4/3,2	6,4	3,2	0,75 +/-0,15	50	1,22
9,5/4,8	9,5	4,8	0,80 +/-0,15	50	1,22
12,7/6,4	12,7	6,4	0,85 +/-0,15	50	1,22
19,1/9,5	19,1	9,5	0,95 +/-0,20	25	1,22
25,4/12,7	25,4	12,7	1,10 +/-0,20	25	1,22
38,1/19,1	38,1	19,1	1,25 +/- 0,40	25	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear