

# BPDW HT

Adhesive lined Polyolefin heat-shrink tubing


- High shrink ratio
- High temperature resistance
- Flame-retardant
- Adhesive lined

## Specifications

Description	BPDW HT
Material	Polyolefin, double-walled
Shrink ratio	4:1
Operating temp. Min.	-55°C
Operating temp. Max.	+150°C
Shrink temp. Min.	+150°C
Flammability	flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>10,3 MPa
Dielectric strength	>19,7 kV/mm
Adhesive coating	yes
Approvals / Standards	



## Colours

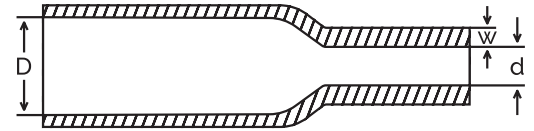

TYPE	on delivery	after shrink		
<b>BPDW HT</b>	<b>Ø (D) min. (mm)</b>	<b>Ø (d) max. (mm)</b>	<b>Wall thickness (w) nom. (mm)</b>	<b>Packaging unit Lengths (Meter)</b>
8,0/1,65	8,00	1,65	1,52	1,22
9,5/2,30	9,50	2,30	1,52	1,22
12,0/2,50	11,60	2,50	2,29	1,22
18,0/4,50	17,80	4,40	2,59	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.