




- flame-retardant
- flexible
- ultra-thin-wall

Specifications

Description	BPUTW
Material	Polyolefin, ultra-thin-walled
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>15 kV/mm
Adhesive coating	none
Approvals / Standards	



Colours

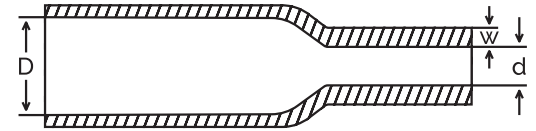

TYPE	on delivery	after shrink		
BPUTW	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
0,7/0,4	0,60	0,40	0,20 +/- 0,06	200
1,5/0,6	1,35	0,60	0,25 +/- 0,06	200
2,0/0,8	1,85	0,80	0,25 +/- 0,06	200
2,5/1,0	2,35	1,00	0,28 +/- 0,06	200
3,0/1,25	2,85	1,25	0,30 +/- 0,06	200
3,5/1,5	3,35	1,50	0,30 +/- 0,06	200
4,0/1,75	3,80	1,75	0,30 +/- 0,06	200
4,5/2,0	4,30	2,00	0,30 +/- 0,06	200
5,5/2,5	5,30	2,50	0,30 +/- 0,06	100
6,5/3,0	6,30	3,00	0,36 +/- 0,06	100
7,0/3,25	6,80	3,25	0,36 +/- 0,05	100
7,7/3,5	7,40	3,50	0,36 +/- 0,05	100
8,5/4,0	8,50	4,00	0,36 +/- 0,05	100
9,5/4,5	9,30	4,50	0,36 +/- 0,05	100
10,5/5,0	10,20	5,00	0,36 +/- 0,05	100
11,5/5,5	11,20	5,50	0,36 +/- 0,05	100
12,5/6,0	12,20	6,00	0,36 +/- 0,05	100
13,5/6,5	13,20	6,50	0,36 +/- 0,06	100
14,5/7,0	14,20	7,00	0,36 +/- 0,06	100

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear



- flame-retardant
- flexible
- ultra-thin-wall


Specifications

Description	BPUTW
Material	Polyolefin, ultra-thin-walled
Shrink ratio	2:1
Operating temp. Min.	-55°C
Operating temp. Max.	+125°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant ¹
Longitudinal change	+/-10% max.
Tensile strength	>10,4 MPa
Dielectric strength	>15 kV/mm
Adhesive coating	none

Approvals / Standards



Colours

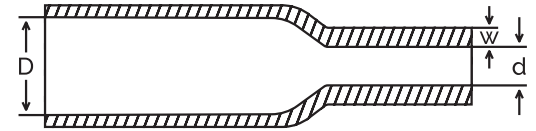

TYPE	on delivery	after shrink		
BPUTW	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
15,5/7,5	15,20	7,50	0,36 +/- 0,06	100
16,5/8,0	16,20	8,00	0,40 +/- 0,06	100
17,5/8,5	17,20	8,50	0,40 +/- 0,06	100
18,6/9,0	18,20	9,00	0,40 +/- 0,06	100
20,6/10,0	20,20	10,00	0,40 +/- 0,06	100
22,6/11,0	22,20	11,00	0,40 +/- 0,06	100
25,7/12,5	25,30	12,50	0,40 +/- 0,06	100
31,0/15,0	30,50	15,00	0,48 +/- 0,08	100
32,0/16,0	30,00	16,00	0,48 +/- 0,08	100
40,0/20,0	38,00	20,00	0,48 +/- 0,08	100
61,0/30,0	59,00	30,00	0,60 +/- 0,10	100

On request, we can print and cut this heat-shrink tubing according to your specifications.

¹ except clear