


FEP HS

Heat-shrinkable tube made from FEP

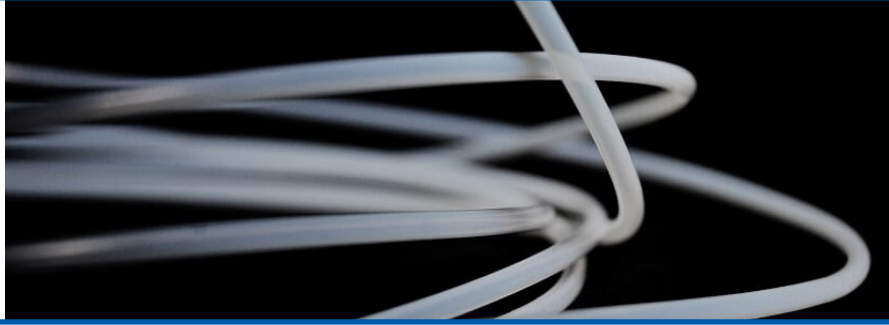


- non-flammable
- high chemical & mechanical resistance
- high temperature stability
- antiadhesive

Specifications

Description	FEP HS
Material	FEP (fluorinated ethylene propylene)
Shrink ratio	1,3:1
Operating temp. Min.	-67°C
Operating temp. Max.	+205°C
Shrink temp. Min.	+180°C
Flammability	non-flammable
Tensile strength	>19 MPa (23°C)
Dielectric strength	>50 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

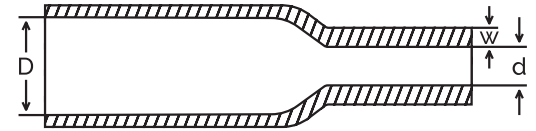

TYPE	on delivery	after shrink		
FEP HS	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit lengths (Meter)
0,78	0,78	0,68	0,20	1,22
0,91	0,91	0,81	0,20	1,22
1,14	1,14	0,99	0,20	1,22
1,52	1,52	1,24	0,23	1,22
1,90	1,90	1,55	0,23	1,22
2,34	2,34	1,83	0,23	1,22
2,92	2,92	2,26	0,23	1,22
3,58	3,58	2,90	0,25	1,22
4,00	4,00	3,15	0,25	1,22
4,57	4,57	3,63	0,25	1,22
5,00	5,00	4,00	0,28	1,22
5,70	5,70	4,57	0,28	1,22
6,30	6,30	5,03	0,28	1,22
7,36	7,36	5,75	0,28	1,22
7,85	7,85	6,33	0,28	1,22
9,30	9,30	7,12	0,30	1,22
10,16	10,16	7,90	0,30	1,22
11,14	11,14	8,87	0,30	1,22
12,70	12,70	9,73	0,38	1,22
14,70	14,70	11,38	0,50	1,22
16,93	16,93	12,95	0,50	1,22
21,00	21,00	16,20	0,50	1,22
25,40	25,40	19,40	0,50	1,22

On request, we can cut this heat-shrink tubing according to your specifications.