




- flexibel
- Spiralschlauch

Technische Daten

Beschreibung	GST
Material	LD-PE
Einsatztemp. Min.	-50°C
Einsatztemp. Max.	+90°C
Zulassungen / Normen	



Farben

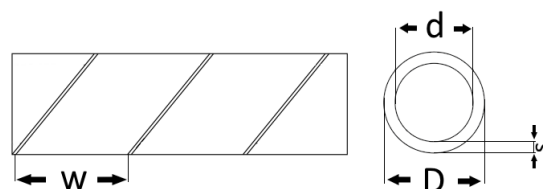

TYP	Bündlungsbereich	d	D	w
GST	(mm)	(mm)	(mm)	(mm)
GST-1	3,0-15,0	2,3	3,5	5,0
GST-3	4,0-20,0	3,7	5,0	7,0
GST-6	7,0-40,0	6,5	8,0	10,0
GST-8	9,0-50,0	8,2	10,0	12,0
GST-10	11,0-70,0	10,0	12,0	14,0
GST-12	13,0-80,0	12,0	14,0	16,0
GST-20	18,0-120,0	17,6	20,0	22,0
GST-22	23,0-150,0	22,2	25,0	27,0