




- flexible
- Spiral-wrap sleeve

Specifications

Description	GST
Material	LD-PE
Operating temp. Min.	-50°C
Operating temp. Max.	+90°C
Approvals / Standards	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px; text-align: center;"> REACH compliant </div> <div style="border: 1px solid black; padding: 2px; text-align: center;"> RoHS compliant </div> </div>

Colours

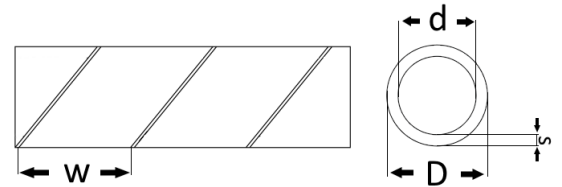

TYPE	Bundling diameter	d	D	w
GST	(mm)	(mm)	(mm)	(mm)
GST-1	3,0-15,0	2,3	3,5	5,0
GST-3	4,0-20,0	3,7	5,0	7,0
GST-6	7,0-40,0	6,5	8,0	10,0
GST-8	9,0-50,0	8,2	10,0	12,0
GST-10	11,0-70,0	10,0	12,0	14,0
GST-12	13,0-80,0	12,0	14,0	16,0
GST-20	18,0-120,0	17,6	20,0	22,0
GST-22	23,0-150,0	22,2	25,0	27,0

070/P740/10/05.2020