


# Protective rubber sleeves

## Polychloroprene rubber sleeves

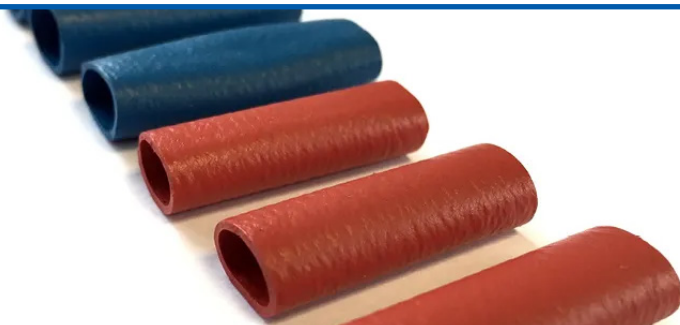

- elastic
- expandable
- flame-retardant
- flexible

### Specifications

Description	Protective rubber sleeves
Material	Polychloroprene rubber
Operating temp. Min.	-30°C
Operating temp. Max.	+90°C
Approvals / Standards	



### Colours



TYPE	for cable sizes	inside diameter	Length	Wall thickness
Protective rubber sleeves	(mm)	(mm)	(mm)	(mm)
1.25 x 20	1.25 – 2.00	1.25	20.00	0.50
1.75 x 20	1.75 – 3.50	1.75	20.00	0.50
2.40 x 20	2.40 – 4.50	2.40	20.00	0.60
2.50 x 20	2.50 – 5.50	2.50	20.00	0.90
3.00 x 25	3.00 – 6.00	3.00	25.00	0.60
4.00 x 30	4.00 – 8.00	4.00	30.00	1.20
5.00 x 30	5.00 – 9.00	5.00	30.00	0.70
7.50 x 30	7.50 – 12.00	7.50	30.00	0.80
10.00 x 35	10.00 – 15.00	10.00	35.00	0.90
12.00 x 50	12.00 – 20.00	12.00	50.00	1.20
14.00 x 50	14.00 – 23.00	14.00	50.00	1.30
17.00 x 50	17.00 – 28.00	17.00	50.00	1.30

070/P750/10/05.2020