


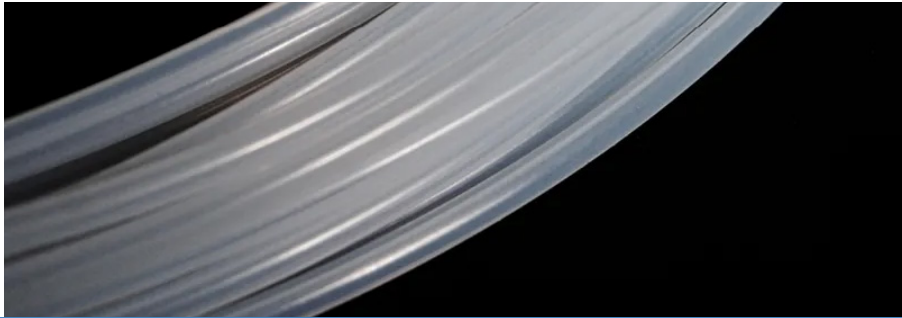

- high bending fatigue strength
high chemical resistance
high temperature resistance
non-flammable

Table with 2 columns: Specification, Value. Rows include Description (PFA ISO AWG), Material (PFA), Operating temp. Min. (-60°C), Operating temp. Max. (+240°C), and Approvals / Standards (REACH compliant, RoHS compliant).

Colours section showing a color swatch and a technical cross-section diagram of the tubing with dimensions D (inner diameter) and w (wall thickness).

Table with 3 columns: TYPE, Inner diameter (D) (mm), wallthickness (w) nom. (mm). Rows list various PFA ISO AWG sizes from 1/16" to 1 1/2" with their corresponding dimensions and tolerances.

On request, we can cut this insulating sleeve according to your specifications.