




- high bending fatigue strength
- high chemical resistance
- high temperature resistance
- non-flammable

Specifications

Description	PFA ISO
Material	PFA
Operating temp. Min.	-60°C
Operating temp. Max.	+240°C
Approvals / Standards	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; padding: 2px; text-align: center;"> REACH compliant </div> <div style="border: 1px solid black; padding: 2px; text-align: center;"> RoHS compliant </div> </div>

Colours

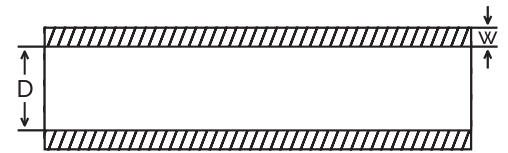

TYPE	Inner diameter (D)	wallthickness (w) nom.
PFA ISO	(mm)	(mm)
0,8 x 0,4	0,8 +/- 0,05	0,4
1,0 x 0,5	1,0 +/- 0,05	0,5
1,0 x 1,0	1,0 +/- 0,10	1,0
1,6 x 0,8	1,6 +/- 0,10	0,8
2,0 x 0,5	2,0 +/- 0,10	0,5
2,0 x 1,0	2,0 +/- 0,10	1,0
3,0 x 1,0	3,0 +/- 0,10	1,0
4,0 x 1,0	4,0 +/- 0,10	1,0
6,0 x 1,0	6,0 +/- 0,10	1,0
6,0 x 1,5	6,0 +/- 0,10	1,5
8,0 x 1,0	8,0 +/- 0,10	1,0
9,0 x 1,5	9,0 +/- 0,10	1,5
10,0 x 1,0	10,0 +/- 0,10	1,0
12,0 x 1,0	12,0 +/- 0,15	1,0
12,0 x 1,5	12,0 +/- 0,15	1,5
14,0 x 1,0	14,0 +/- 0,15	1,0
16,0 x 1,0	16,0 +/- 0,15	1,0
18,0 x 1,0	18,0 +/- 0,15	1,0
20,0 x 1,0	20,0 +/- 0,15	1,0

On request, we can cut this insulating sleeve according to your specifications.