

# PTFE 400

Heat-shrinkable tube made from polytetrafluorethylene




- non-flammable
- high chemical & mechanical resistance
- high temperature stability
- antiadhesive
- very high shrink ratio

## Specifications

Description	PTFE 400
Material	PTFE (Polytetrafluorethylene)
Shrink ratio	4:1
Operating temp. Min.	-67°C
Operating temp. Max.	+260°C
Shrink temp. Min.	+327°C
Flammability	non-flammable
Tensile strength	>29 MPa (23°C)
Dielectric strength	>40 kV/mm
Adhesive coating	no
Approvals / Standards	



## Colours

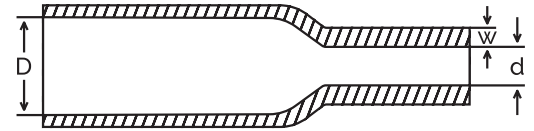

TYPE	on delivery	after shrink			
PTFE 400	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)	Packaging unit lengths (Meter)
5/64	1,98	0,64	0,22	on request	1,22
1/8	3,18	0,94	0,25	on request	1,22
3/16	4,75	1,27	0,30	on request	1,22
1/4	6,35	1,60	0,30	on request	1,22
5/16	7,92	2,00	0,30	on request	1,22
3/8	9,52	2,44	0,30	on request	1,22
1/2	12,70	3,66	0,38	on request	1,22
5/8	15,87	4,52	0,38	on request	1,22
3/4	19,05	5,70	0,38	on request	1,22
1	25,40	7,06	0,38	on request	1,22
1 1/4	31,75	8,82	0,38	on request	1,22
1 1/2	38,10	10,20	0,38	on request	1,22
1 3/4	44,45	11,43	0,38	on request	1,22
2	50,80	13,20	0,50	on request	1,22
3	76,20	19,70	0,50	on request	1,22
4	101,60	26,00	0,63	on request	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.