


PTFE / FEP

Dual heat-shrinkable tubing made from PTFE with FEP-inlay

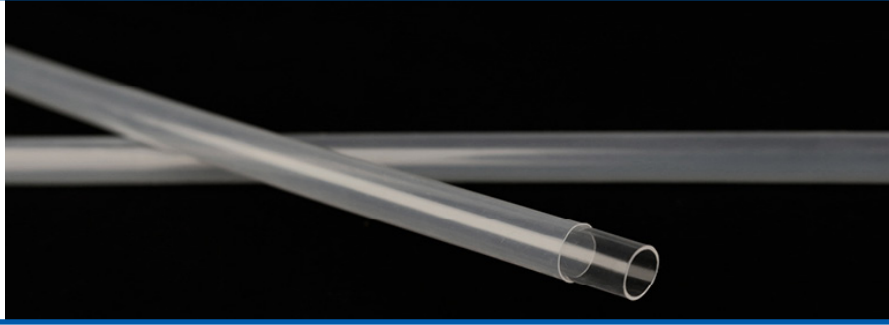


- non-flammable
- high chemical & mechanical resistance
- high temperature stability
- antiadhesive
- air-, & watertight connection

Specifications

Description	PTFE/FEP
Material	PTFE with FEP-Inlay
Shrink ratio	2:1
Operating temp. Min.	-67°C
Operating temp. Max.	+205°C
Shrink temp. Min.	+327°C
Flammability	non-flammable
Tensile strength	>19 MPa (23°C)
Dielectric strength	>40 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

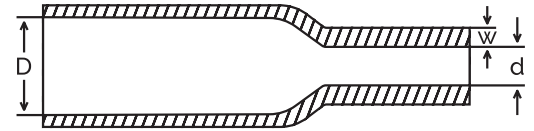

TYPE	on delivery	after shrink	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)
PTFE/FEP	Ø (D) min. (mm)	Ø (d) max. (mm)		
0,91/0,00	0,91	0,00	0,60	1,22
1,52/0,00	1,52	0,00	0,70	1,22
3,30/0,00	3,30	0,00	0,80	1,22
4,05/0,00	4,05	0,00	0,80	1,22
4,80/1,60	4,80	1,60	0,90	1,22
6,40/3,20	6,40	3,20	0,90	1,22
8,90/4,80	8,90	4,80	0,90	1,22
11,40/7,90	11,40	7,90	1,40	1,22
17,80/11,20	17,80	11,20	1,40	1,22
24,10/16,00	24,10	16,00	1,65	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.