


# PTFE / FEP LW

Thin-walled dual heat-shrinkable tubing made from PTFE with FEP-inlay

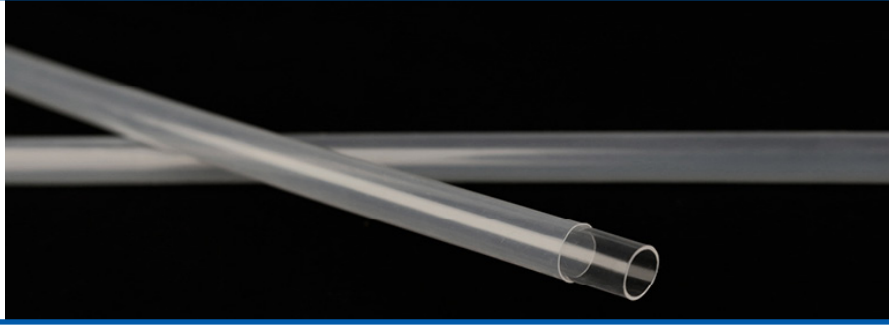


- non-flammable
- high chemical & mechanical resistance
- high temperature stability
- antiadhesive
- air-, & watertight connection

## Specifications

Description	PTFE/FEP
Material	PTFE with FEP-Inlay
Shrink ratio	2:1
Operating temp. Min.	-67°C
Operating temp. Max.	+205°C
Shrink temp. Min.	+327°C
Flammability	non-flammable
Tensile strength	>19 MPa (23°C)
Dielectric strength	>40 kV/mm
Adhesive coating	no
Approvals / Standards	



## Colours

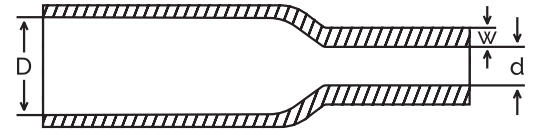

TYPE	on delivery	after shrink	Wall thickness (w) nom. (mm)	Packaging unit rolls (Meter)
<b>PTFE/FEP LW</b>	<b>Ø (D) min. (mm)</b>	<b>Ø (d) max. (mm)</b>		
1,65/0,00	1,65	0,00	0,38	1,22
2,90/1,15	2,90	1,15	0,38	1,22
3,30/1,50	3,30	1,50	0,38	1,22
4,60/1,65	4,60	1,65	0,38	1,22
4,80/1,80	4,80	1,80	0,38	1,22
6,10/3,80	6,10	3,80	0,50	1,22
8,90/5,40	8,90	5,40	0,65	1,22
12,20/8,00	12,20	8,00	0,80	1,22
17,80/12,70	17,80	12,70	1,00	1,22
25,40/17,80	25,40	17,80	1,15	1,22

On request, we can print and cut this heat-shrink tubing according to your specifications.