




- flame-retardant
- flexible
- self-extinguishing

Specifications

Description	WPS 105
Material	Soft-PVC
Shrink ratio	2:1
Operating temp. Min.	-30°C
Operating temp. Max.	+105°C (clear: +70°C)
Shrink temp. Min.	+135°C
Flammability	Flame-retardant
Longitudinal change	+/-10% max.
Tensile strength	>19,0 MPa
Dielectric strength	>15 kV/mm
Adhesive coating	no
Approvals / Standards	



Colours

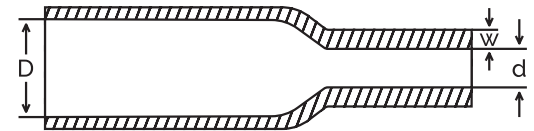

TYPE	on delivery	after shrink		
WPS 105	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
3/32	2,4	1,2	0,40	250
1/8	3,2	1,6	0,45	250
3/16	4,8	2,4	0,50	250
1/4	6,4	3,2	0,60	250
3/8	9,5	4,8	0,60	125
1/2	12,7	6,4	0,65	100
5/8	16,0	8,0	0,80	100
3/4	19,1	9,5	0,80	100
1	25,4	12,7	1,00	100
1 1/2	38,1	19,1	1,00	50
2	50,8	25,4	1,00	25
3	76,2	38,1	1,00	25
4	101,6	51,0	1,30	25

On request, we can print and cut this heat-shrink tubing according to your specifications.