




- high shrink ratio
- high temperature resistance
- flame-retardant
- ideally suited for thermal transfer printing
- halogen-free

Specifications

Description	BIMS 300
Material	Polyolefin, thin-walled, lay-flat
Shrink ratio	3:1
Operating temp. Min.	-55°C
Operating temp. Max.	+135°C
Shrink temp. Min.	+90°C
Flammability	flame-retardant
Longitudinal change	+/-5% max.
Tensile strength	>10,3 MPa
Dielectric strength	>19,7 kV/mm
Adhesive coating	none
Approvals / Standards	



Colours

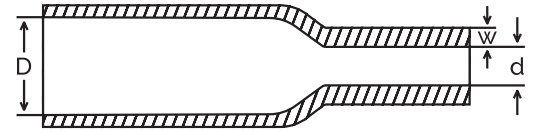

TYPE	on delivery		after shrink	
	Ø (D) min. (mm)	Ø (d) max. (mm)	Wall thickness (w) nom. (mm)	Packaging unit (Meter)
BPIMS 300				
2,4/0,8	2,40	0,80	0,42	100
3,2/1,0	3,20	1,07	0,52	100
4,8/1,6	4,80	1,60	0,52	100
6,4/2,1	6,40	2,11	0,52	100
9,5/3,2	9,50	3,20	0,52	75
12,7/4,2	12,70	4,22	0,52	75
19,1/6,4	19,10	6,40	0,67	30
25,4/8,5	25,40	8,50	0,77	30
38,1/12,7	38,10	12,70	0,87	30
50,8/17,0	50,80	17,00	0,87	30

On request, we can print and cut this heat-shrink tubing according to your specifications.